



Chemical Consultants INCORPORATED

IW-109

Screen Wash / Recirculating Wash

General Description

IW-109 is a water soluble ink degradant. It is highly effective on plastisol, multi-purpose (solvent based), poster, UV and vinyl inks. IW-109 will protect the fabric from deep stains or ghosting from the image print. This makes it much easier when complete reclamation of the screen is necessary. IW-109 can be used in a wide variety of innovative cleaning processes ranging from re-circulation machines, dip tanks, immersion cleaning processes, and automatic reclaiming machines. It can also be applied manually with a scrub pad, spray bottle, or pneumatic pump systems.

Quick Tip:

Always pressure wash screen from the bottom and work upwards.

This will prevent ink from locking back onto the mesh when coming in contact with the rinse water.

Advantages

- Low Odor
- High Solvency
- High Load Capacity To Reduce Usage
- Non-Flammable
- Non-Hazardous
- Mesh Safe
- Multiple Applications
- Will Not Attack Cyanoacrylate (Instant) Adhesives

Applications

Always card excessive ink from screen. Use one of the following applications.




4 x 4 Stainless Steel
Recirculating Booth

Recirculating Wash:

Card excessive ink from the screen. This product can continuously recirculated until product becomes too heavily soiled with solids. Used product may be filtered and reused.

Sizes Available:

Quart	Gallon	4 x 1 Gallon
5 Gallon Pail	55 Gallon Drum	

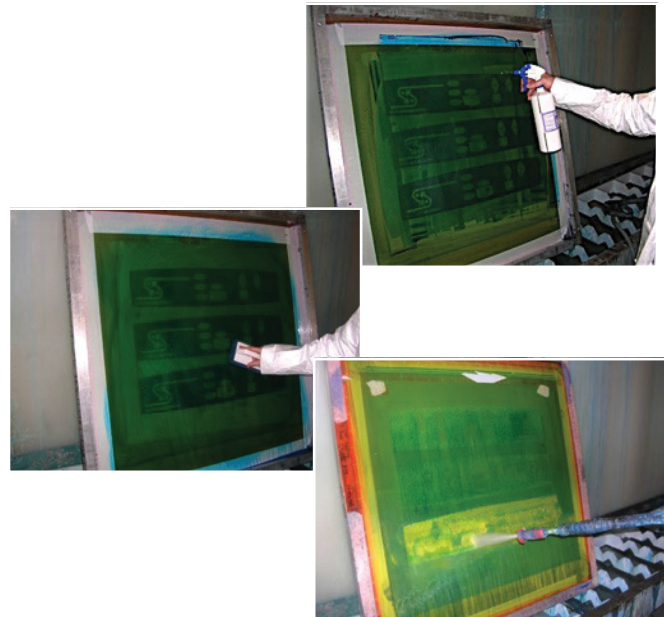

Ink Wash-Out At The Sink:

Card excessive ink from the screen. Apply IW-109 to ink side of screen. Use a non-abrasive scrub brush or pad to agitate ink on both sides of screen. Finally, rinse away all residue away using high pressure water.