



Chemical Consultants INCORPORATED

IW-6

Graphic & Textile Screen Wash

General Description

IW-6 is a water soluble ink degradant. It is highly effective on plastisol, multi-purpose (solvent based), poster, UV, and vinyl inks. IW-6 will protect the fabric from deep stains or ghosting from the image print. This makes it much easier when complete reclamation of the screen is necessary.

IW-6 can be used in a wide variety of innovative cleaning processes ranging from re-circulation machines, dip tanks, immersion cleaning processes, and automatic reclaiming machines. It can also be applied manually with a scrub pad, spray bottle, or pneumatic pump systems.

Advantages

- Non-Flammable
- Low Odor
- Low Vapor Pressure
- Low VOC (Volatile Organic Compound)
- High Solvency
- High load capacity to reduce usage
- Mesh Safe
- Safe for use with most frame adhesives
- Multiple applications

Applications

Always card excessive ink from screen. Use one of the following applications.



**4 x 4 Stainless Steel
Recirculating Booth**

Recirculating Wash:

Card excessive ink from the screen. This product can be continuously recirculated until product becomes too heavily soiled with solids. Used product may be filtered and reused.

Sizes Available:

Quart

Gallon

4 x 1 Gallon


5 Gallon Pail

55 Gallon Drum

Quick Tip:

Always pressure wash screen from the bottom and work upwards.

This will prevent ink from locking back onto the mesh when coming in contact with the rinse water.

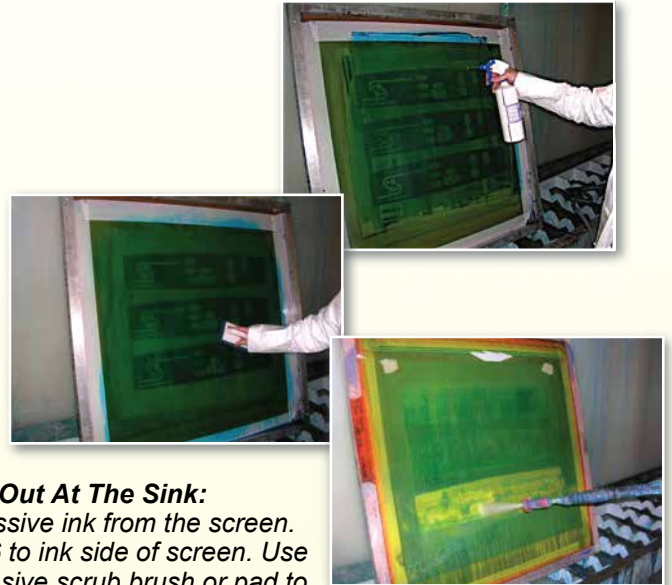

Ink Wash-Out At The Sink:

Card excessive ink from the screen. Apply IW-6 to ink side of screen. Use a non-abrasive scrub brush or pad to agitate ink on both sides of screen. Finally, rinse all residue away using high pressure water.

E-44PL EconoBooth

