



Chemical Consultants INCORPORATED

LC-5

Lexan Cleaner / Press Wash

General Description

LC-5 is recommended for use on Lexan substrates. It will solubilize most inks including ceramic, enamel, epoxy, lacquer, multi-purpose (solvent-based), and UV inks. LC-5 is emulsion and capillary stencil safe. It will protect the fabric from deep stains or ghosting from the image print, which makes it much easier when complete reclamation of the screen is necessary.

LC-5 will perform as a press wash when changing colors between jobs and/or as a screen opener for continuous printing. It can also be used as a final spray & wipe ink cleaner. LC-5 can be recirculated or applied manually with a rag, spray bottle, or pneumatic spray systems. LC-5 is fast drying and leaves no film or residue on the mesh.


Advantages

- High Solvency
- Fast Drying
- Low Odor
- Mesh Safe
- Emulsion Safe
- Low Vapor Pressure
- High Load Capacity To Reduce Usage
- Multiple Applications.

Application

Always card excessive ink from screen. Use one of the following applications.

PRESS WASH / SCREEN OPENER / SPRAY & WIPE

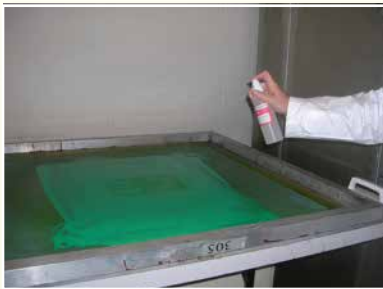

Step 1. Spray LC-5 on squeegee side of screen.



Step 2. Scrub ink with a non-absorbent pad until liquified.



Step 3. Use rags or towels to wipe up ink residue. Re-apply to clean up ink residue in image area.



**4 x 4 Stainless Steel
Recirculating Booth**

RECIRCULATING WASH

Card excessive ink from the screen. LC-5 can be continuously recirculated until product becomes too heavily soiled with solids. Used product may be filtered and reused.

SQ-1000



5 Gallon Pail

Sizes Available:

Pint

Quart

4 x 1 Quart

Gallon

4 x 1 Gallon

5 Gallon Pail

Quick Tip:

To cut down on the number of rags it takes to clean a screen, use a non absorbent scrub pad to liquify the ink and a squeegee to pull all the ink to one end of the screen and wipe up with one or two rags.