



## GENERAL DESCRIPTION

ProChem® 480G is designed for all inks, especially vinyl, water base, epoxy, plastisol, enamel and UV inks. This product will perform as a press wash when changing colors between jobs and/or as a screen opener for continuous printing. ProChem® 480G will protect the fabric from deep stains or ghosting from the image print. This makes it much easier when complete reclamation of the screen is necessary. ProChem® 480G immediately liquifies the ink and dries quickly, leaves no film or oily residue.

## ADVANTAGES


- Fast Drying
- Emulsion safe
- High solvency
- Low Odor
- High load capacity to reduce usage
- Mesh Safe

## APPLICATION


First card excessive ink from the screen.

ProChem® 480G can be applied manually with a rag, spray bottle, or pneumatic pump systems.


### **PRESS WASH AND SCREEN OPENER**

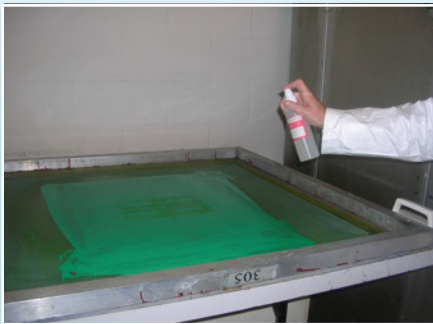

Step 1 . Spray ProChem® 480G on the squeegee side of screen.

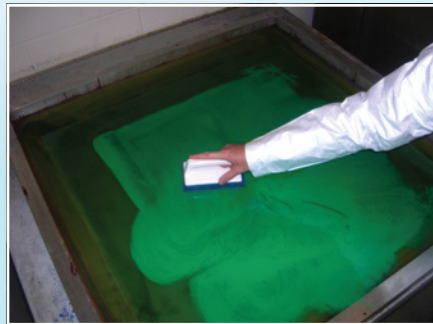

Step 2 . Scrub ink with a non-absorbent pad until liquified.

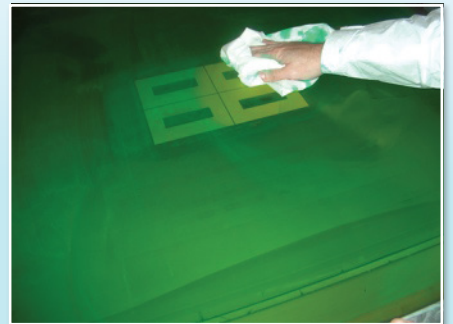

Step 3 . Use rags or towels to wipe up ink residue. Re-apply to clean up ink residue in image area.

#### **Quick Tip:**

To cut down on the number of rags it takes to clean a screen, use a non absorbent scrub pad to liquify the ink and a squeegee to pull all the ink to one end of the screen and wipe up with one or two rags.

## **Available in:**

1 gallon

5 gallon

55 gallon

# ProChem® 480G