



General Description

Prochem® HDX is a specially formulated emulsion hardener remover. This product will break the chemical bond on a post-hardened emulsion. Once the chemical bond is broken, the emulsion can be removed using the normal procedure with any of CCI's effective emulsion removers. HDX improves the speed and efficiency of the reclaim procedure on difficult post-hardened screens.

Advantages

- Easy to Use
- Breaks the "Post Hardened" chemical bond
- Dramatically increases the reclaim speed process
- Non-Hazardous
- Non Flammable
- Low Odor
- Low VOC (Volatile Organic Compound)
- Mesh Safe
- Biodegradable / Drain Safe

Application

Always card excessive ink from the screen.

Step 1.

After the ink removal process, apply HDX generously to both sides of a dry screen, directly on the post-hardened emulsion. Scrub (agitate) both sides of the screen with a semi-abrasive scrub pad.

Step 2.

Agitate both sides of the screen with a scrub pad. Allow the HDX to dwell on the screen for 1-3 minutes.

Step 3.

High pressure rinse the screen - starting at the bottom. If necessary, apply an emulsion remover and continue with the reclaim procedure.

Quick Tip:

The use of a high pressure unit will make the reclaim (stripping) procedure easier.

1022 HP

1000 P.S.I.


[Click here for more details.](#)



Step 1. Apply HDX on both sides of dry screen.



Step 2. Scrub screen with non-abrasive pad or brush. Allow to dwell for 1-3 minutes.

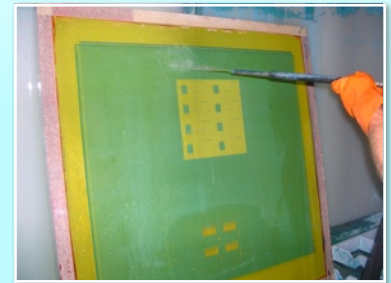

Step 3. High pressure rinse - starting at bottom.

Available in:

1 quart

1 gallon

5 gallon

30 gallon

55 gallon

Prochem®

HDX