



Chemical Consultants INCORPORATED

SS-200

Graphic Press Wash / Spray & Wipe

General Description

SS-200 is designed for all inks, especially vinyl, water base, epoxy, plastisol, enamel and UV inks. This product will perform as a press wash when changing colors between jobs and/or as a screen opener for continuous printing. SS-200 will protect the fabric from deep stains or ghosting from the image print. This makes it much easier when complete reclamation of the screen is necessary. SS-200 immediately liquifies the ink and dries quickly, leaving no film or oily residue.

Advantages

- Fast Drying
- Emulsion Safe
- High Solvency
- Low Odor
- High Load Capacity To Reduce Usage
- Mesh Safe


Quick Tip:

To cut down on the number of rags it takes to clean a screen, use a non absorbent scrub pad to liquify the ink and a squeegee to pull all the ink to one end of the screen and wipe up with one or two rags.


Application

First card excessive ink from the screen.


SS-200 can be applied manually with a rag, spray bottle, or pneumatic pump systems.

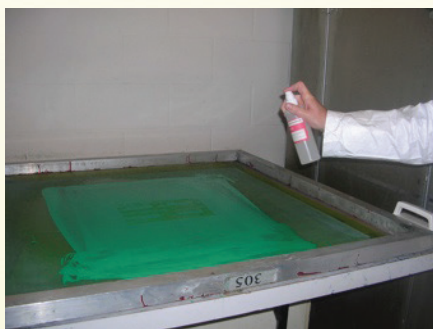

Step 1. Spray SS-200 on squeegee side of screen.

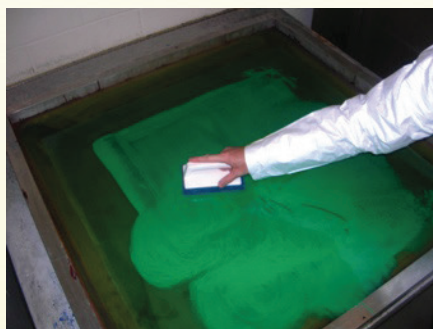

Step 2. Scrub ink with a non-absorbent pad until liquified.

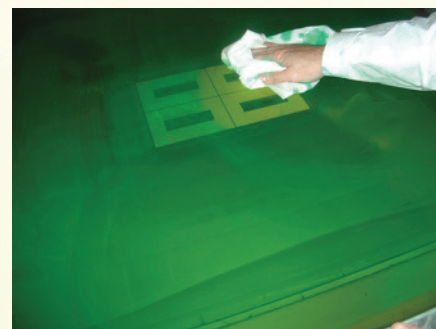

Step 3. Use rags or towels to wipe up ink residue. Re-apply to clean up ink residue in image area.

Sizes Available:

Quart

Gallon

4 x 1 Gallon

5 Gallon Pail

55 Gallon Drum