



Chemical Consultants INCORPORATED

Screen Wash #142

Graphic Press Wash / Spray & Wipe

General Description

Screen Wash #142 is designed for all inks, especially epoxy, plastisol, enamel, and UV inks. This product will perform as a press wash when changing colors between jobs and/or as a screen opener for continuous printing. Screen Wash #142 will protect the fabric from deep stains or ghosting from the image print. This makes it much easier when complete reclamation of the screen is necessary. Screen Wash #142 immediately liquifies the ink and dries quickly, leaving no film or oily residue.

Advantages

- High Solvency
- Low Odor
- Mesh Safe
- Emulsion Safe
- Low Vapor Pressure
- High Load Capacity To Reduce Usage
- Multiple Applications


Application

Always card excessive ink from screen. Use one of the following applications.


Quick Tip:

To cut down on the number of rags it takes to clean a screen, use a non absorbent scrub pad to liquify the ink and a squeegee to pull all the ink to one end of the screen and wipe up with one or two rags.


PRESS WASH AND SCREEN OPENER

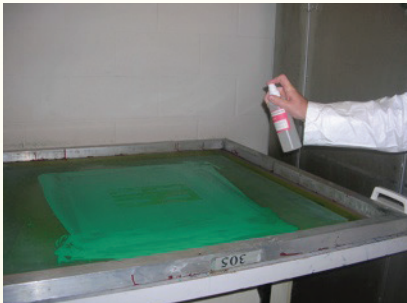

Step 1. Spray Screen Wash #142 on the squeegee side of screen.

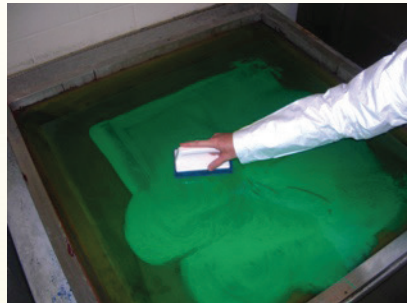

Step 2. Scrub ink with a non-absorbent pad until liquified.

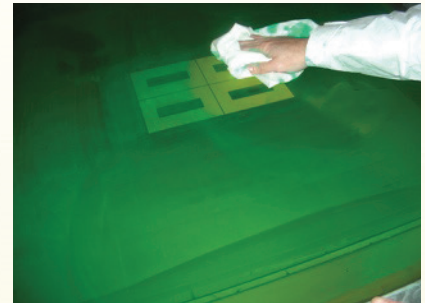

Step 3. Use rags or towels to wipe up ink residue. Re-apply to clean up ink residue in image area.

RECIRCULATING WASH

Card excessive ink from the screen. Screen Wash #142 can be continuously recirculated until product becomes too heavily soiled with solids. Used product may be filtered and reused.



426D SS



SQ-1000

Sizes Available:

Quart

Gallon

4 x 1 Gallon

5 Gallon Pail

55 Gallong Drum