



Chemical Consultants INCORPORATED

VW INK WASH

Graphic Press Wash / Spray & Wipe

General Description

VW Ink Wash is designed for all inks, especially vinyl, water base, epoxy, plastisol, enamel and UV inks. This product will perform as a press wash when changing colors between jobs and/or as a screen opener for continuous printing. VW Ink Wash will protect the fabric from deep stains or ghosting from the image print. This makes it much easier when complete reclamation of the screen is necessary. VW Ink Wash immediately liquifies the ink and dries quickly, leaves no film or oily residue.

Advantages

- Fast Drying
- Emulsion Safe
- High Solvency
- Low Odor
- High Load Capacity To Reduce Usage
- Mesh Safe


Application

First card excessive ink from the screen.


VW Ink Wash can be applied manually with a rag, spray bottle, or pneumatic pump systems.

Quick Tip:

To cut down on the number of rags it takes to clean a screen, use a non absorbent scrub pad to liquify the ink and a squeegee to pull all the ink to one end of the screen and wipe up with one or two rags.

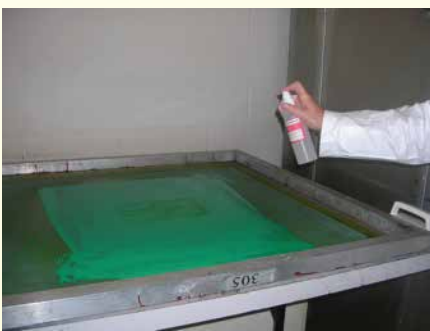

Step 1. Spray VW Ink Wash on squeegee side of screen.

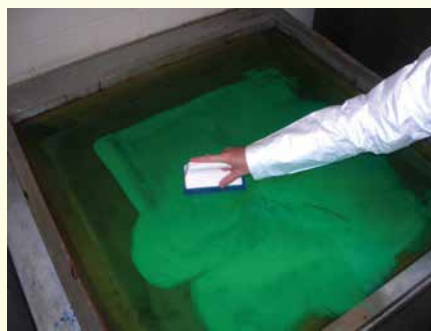

Step 2. Scrub ink with a nonabsorbent pad until liquified.



Step 3. Use rags or towels to wipe up ink residue. Re-apply to clean up ink residue in image area.

Sizes Available:

Quart

Gallon

4 x 1 Gallon

5 Gallon Pail

55 Gallon Drum