



Chemical Consultants INCORPORATED

TS-400

Press Wash

General Description

TS-400 is best suited for clean-up of plastisol ink. Use this product as a screen opener, as a screen wash when saving the emulsion, and as a press wipe during continuous printing. This product is also an excellent cleaner for the removal of pallet or belt printers' adhesive.

This product can be used in a wide variety of innovative cleaning processes ranging from re-circulation machines, dip tanks, or precision immersion cleaning processes. It may also be applied manually by a brush or a hand held sprayer. TS-400 is fast drying and leaves no film or oil residue so that the clean surface is in excellent condition for tape adhesion.

Advantages

- High Solvency
- Low Odor
- Mesh Safe
- Emulsion Safe
- Low Vapor Pressure
- High Load Capacity To Reduce Usage
- Multiple Applications


Application

Always card excessive ink from screen. Use one of the following applications.


Quick Tip:

To cut down on the number of rags it takes to clean a screen, use a non absorbent scrub pad to liquify the ink and a squeegee to pull all the ink to one end of the screen and wipe up with one or two rags.

PRESS WASH AND SCREEN OPENER

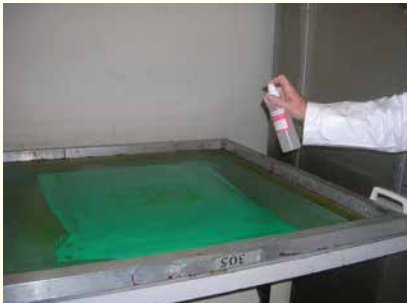

Step 1. Spray TS-400 on the squeegee side of screen.

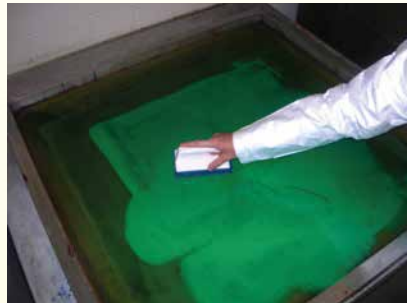

Step 2. Scrub ink with a non-absorbent pad until liquified.



Step 3. Use rags or towels to wipe up ink residue. Re-apply to clean up ink residue in image area.

RECIRCULATING WASH

Card excessive ink from the screen. TS-400 can be continuously recirculated until product becomes too heavily soiled with solids. Used solids. Used product may be filtered and reused.



426D SS



SQ-1000

Sizes Available:

Quart

Gallon

4 x 1 Gallon

5 Gallon Pail

55 Gallon Drum